

VC-BC601P/BC701P Firmware Upgrade Instruction


1 Device and Tool Preparation

1.1 Please prepare following devices and tools before FW upgrade.

VC-BC601P/BC701P	PC or Laptop
	
Power adapter and power cord	Ethernet cable
	


2 Connections and get IP address (skip the step if you know the IP of your camera.)

2.1 Connect camera to network

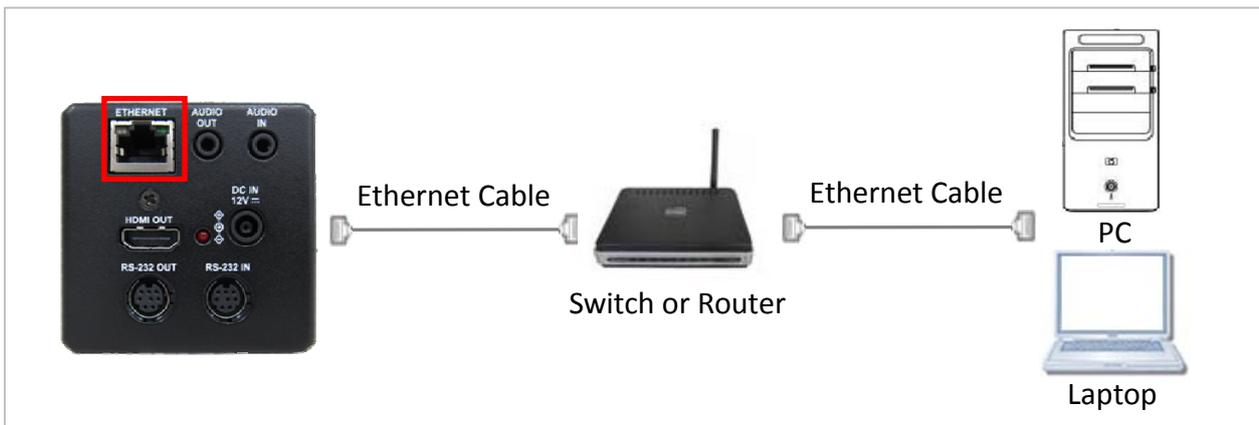


2.2 Download VMS5.0 software from Lumens website and install it.

2.3 Launch VMS software and click "Discovery Device IP" button to get the camera IP address. (Only can search the device of the same network.)

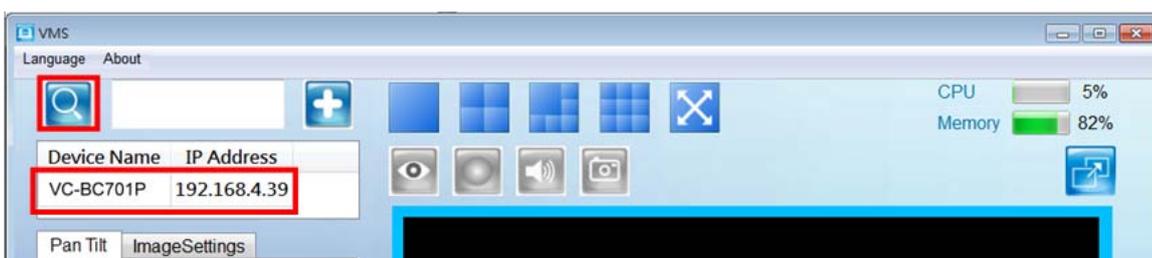

3 FW Download Procedure


3.1 Open browser and enter the IP address of the camera in the address bar.

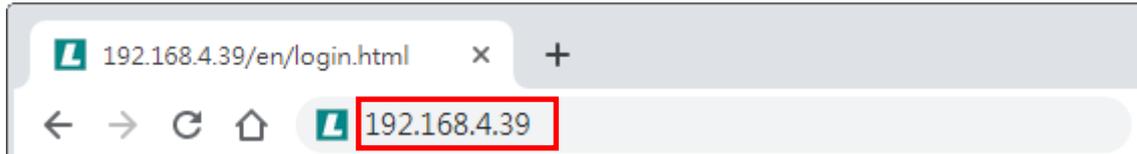


3.2 Enter the account and password to log in webpage

Account: admin


Password: 9999

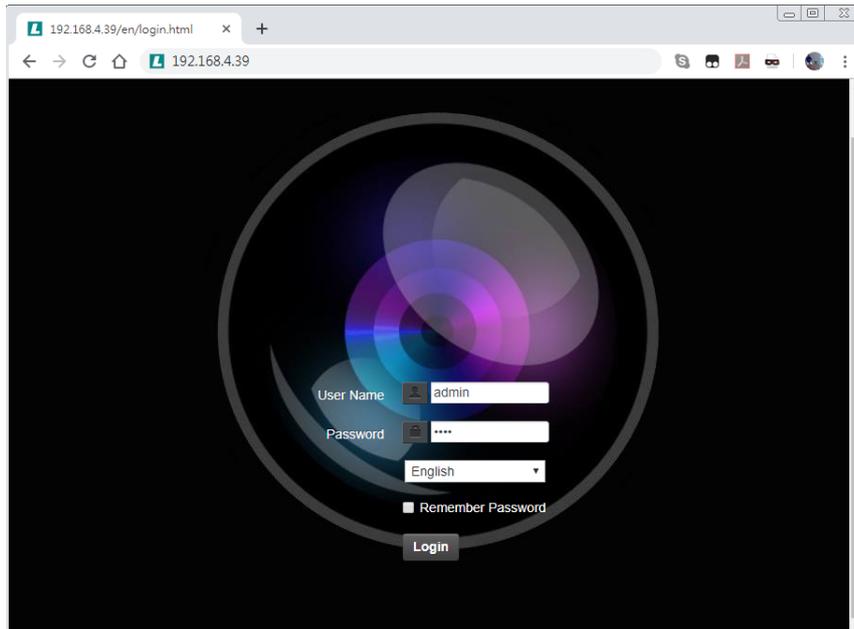


3.3 Select [Maintenance] and click [Choose files...] to select proper firmware then press [Submit].

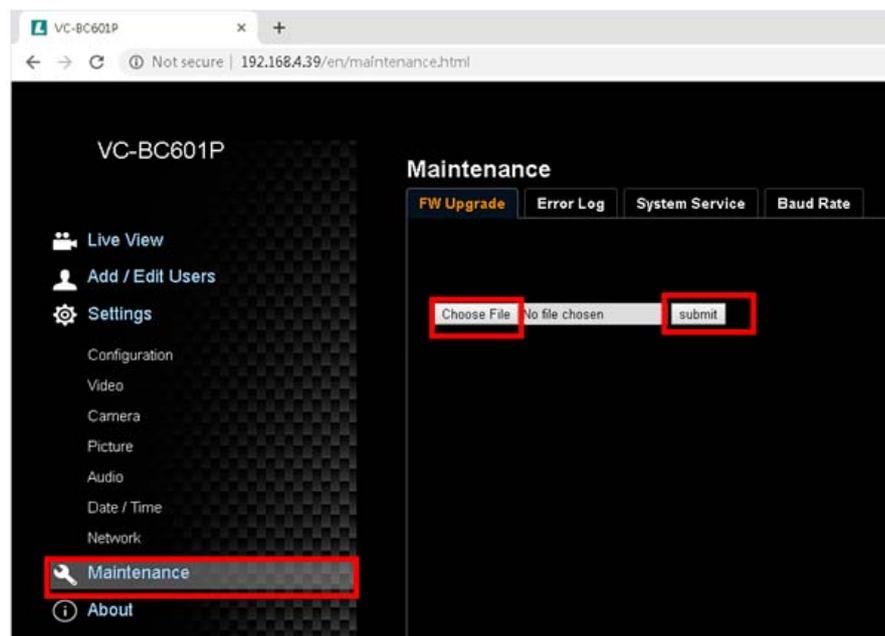


3.4 FW download will start. (Around 2 minutes taken)

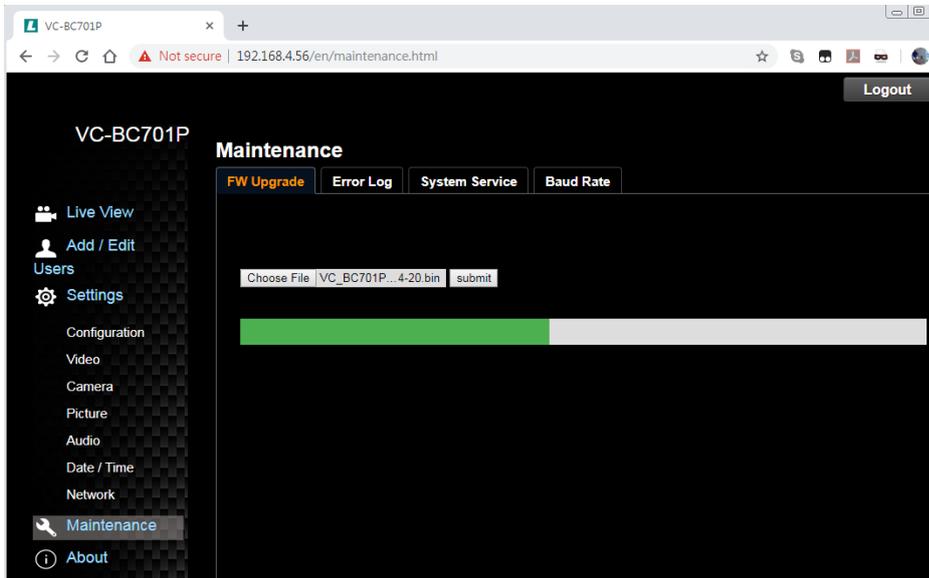


3.5 FW upgrade is successful.

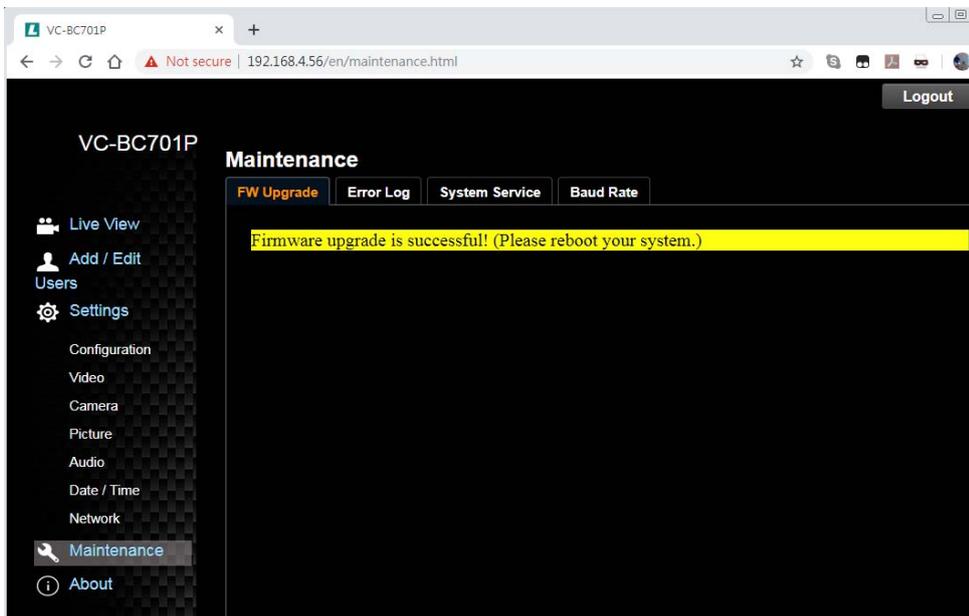


3.6 Please do the [Factory Reset] to ensure the procedure is completed.
[Maintenance]-->[System Service]-->[Factory Reset]

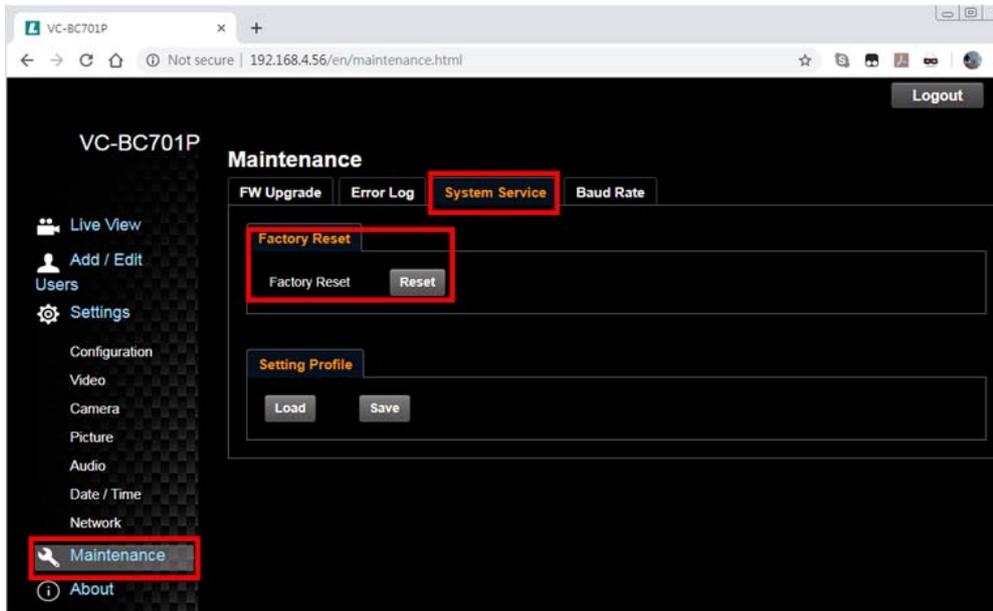

3.7 Click [Yes] and the unit will reboot.

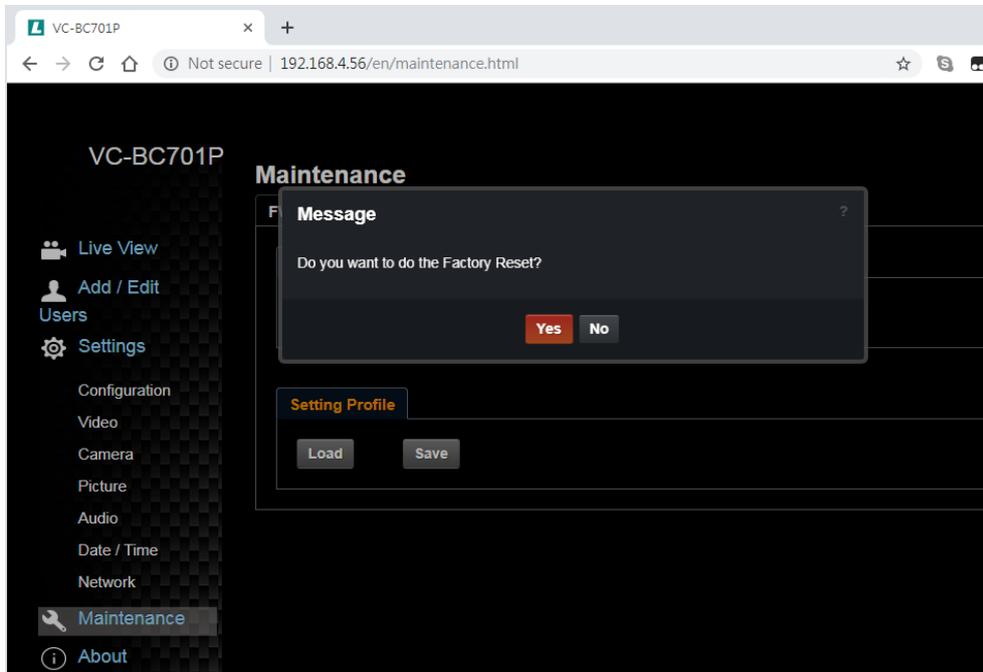

3.8 Login webpage again and check the FW version from [About]-->[Firmware Version]

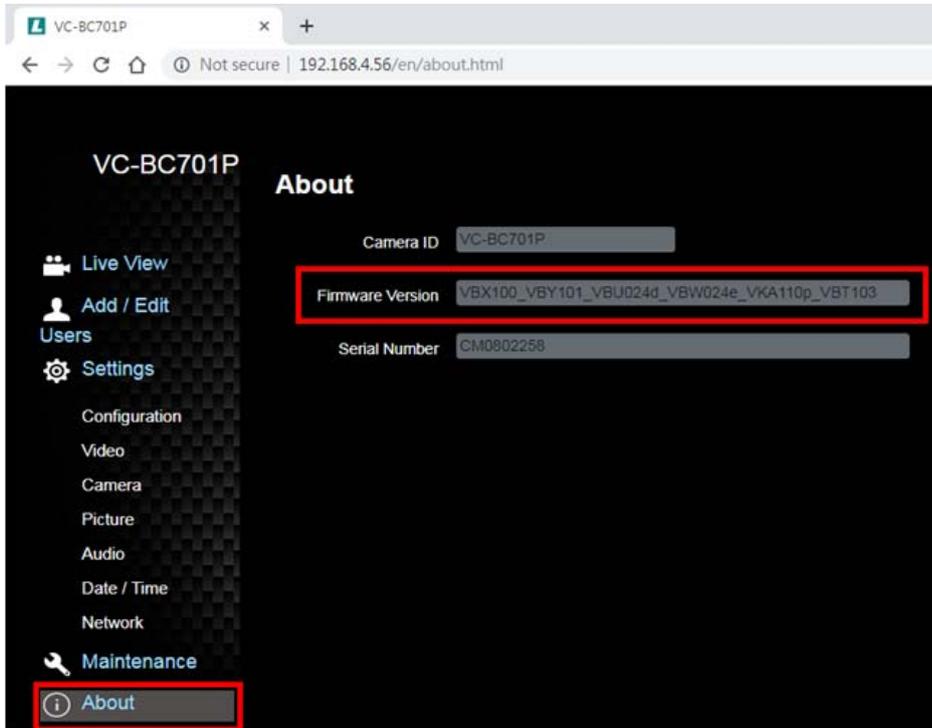

Check FW version on OSD

4.1 Power on the unit and press [Menu] button on the remote control

4.2 Select [Status]

4.3 Go to [System] on the last page.

4.4 Check if the FW version is correct.

The diagram illustrates the steps to check the firmware version on the OSD. It shows a Lumens remote control with the Menu button highlighted. A list of OSD options is shown, with 'Status' highlighted. A screenshot of the System menu is shown, with the Firmware Version 'VIL101c' highlighted.

Exposure
White Balance
Picture
Pan Tilt Zoom
D-effect
Auto Focus
Ethernet
System
Status

[System] 8/8(Up/Down)
Prompt Off
IR Receive On
Motionless Preset Off
Tally Lamp Enable
Audio In Line In
Audio Enable Off
Audio Volume 5
Encode Sample Rate 48 KHz(AAC)
Language English
Output Mode 1080p/60
Control Device Controller
Protocol Protocol V
PD Address 1
Factory Reset Off
FW Upgrade Off
Serial No: V68A02336
Firmware Version VIL101c