

VHD-H1200 Upgrade Guide

1. Network settings

1 Use a network cable to directly connect the camera's network port and the computer's network port, or use a switch to keep the device and computer in the same LAN.

2 Set the computer IP address, the steps are shown in the following figure: (This setting step takes the Chinese version of Windows 7 as an example)

2.1 Right-click "Network Neighborhood" and select "Properties";

2.2 The "Network Connection" window pops up, check "Local Area Connection" (you can also go to the control panel, after finding the network connection, click to enter);


2.3 Right-click on "Local Area Connection" and select Properties, a "Local Area Connection Properties" box will pop up, as shown in the following figure:



2.4 Select "Internet Protocol Version 4 (TCP/IPv4)", double-click the left mouse button, as shown in the following figure:



2.5 Check "Use the following IP address" in the "Internet Protocol 4 (TCP/IPv4)" property box, fill in the IP address, subnet mask and default gateway, and then click the "OK" button to exit. Show as following:

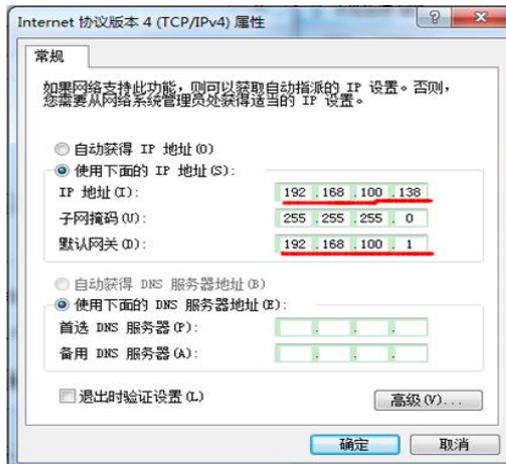


Note:


The computer IP and the camera IP address need to be in the same **network segment**, but not the exact same IP address, otherwise there will be address conflicts;

2. Software version upgrade


2.1 Open the upgrade software in the client folder, in the "search" interface, "network card selection" select the corresponding local connection, click "search" to search all H1200 devices in the network, double-click the device to be upgraded to enter the upgrade interface. Select "Upgrade Mode" as SOC, as shown below:

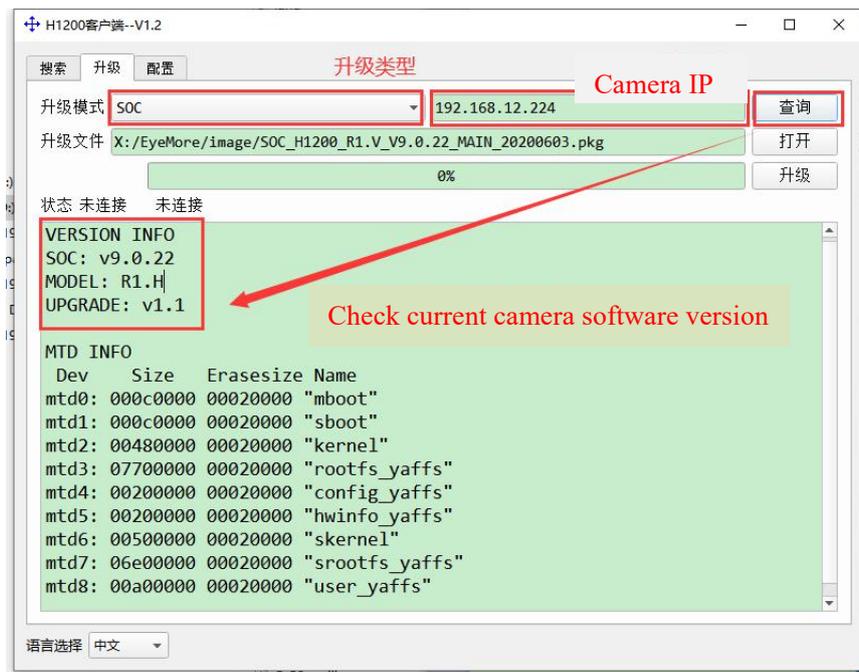

2.2 Then click the "Select" button --- add the software version that needs to be upgraded, as shown below:

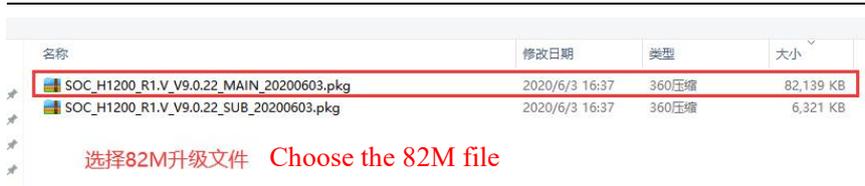

2.3 After selecting the software version, click the "Upgrade" button to start, as shown in the following figure:

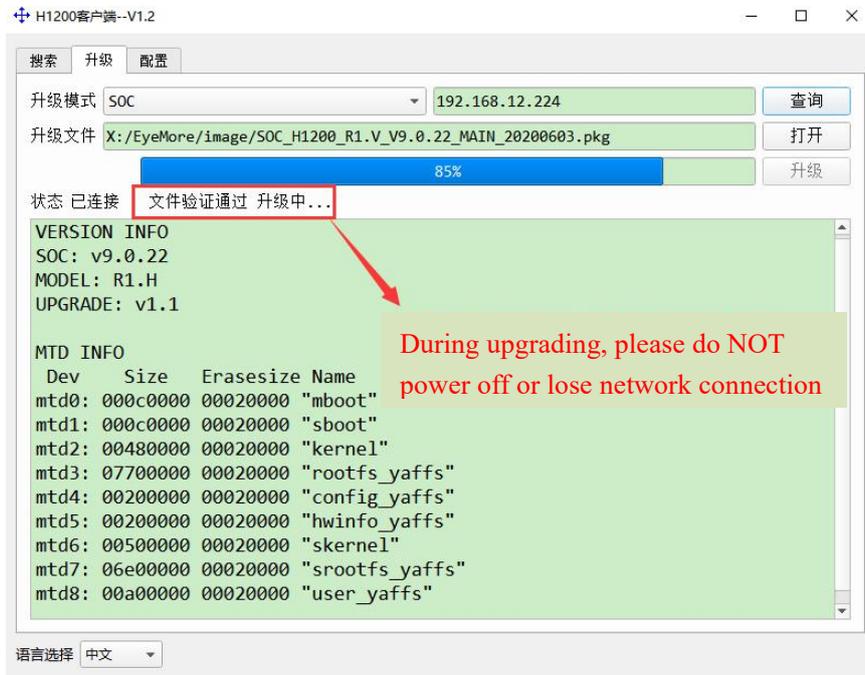

2.4 When the upgrade is completed, the device will automatically restart to take effect.

2.5 When camera upgrade is completed, the IP address and MAC address are not modified;