KT-KD50A   Blackmagic ATEM Controller

Features:
*Multi-function switchboard control panel, ideal for audio and video live broadcasting system, audio and video recording system.
*Connected to ATEM switchers by LAN, and compatible with ATEM Software Control.

Parameters

Fade into Black
Preview Transition
Downstream Keyer Transitions
Audio Control Area

ATEM Television
Studio HD V2.30

FTB PREV TRANS DSK1 DSK2

BKGD KEY1 KEY2 KEY3 KEY4 MIX DIP WIPE STING DVE

1 2 3 4 5 6 7 8 9 10 COL 1 MP 1 AUTO

1 2 3 4 5 6 7 8 9 10 COL 1 MP 1 CUT

Transition Control   PGM Signal Source Selection   PVW Signal Source Selection   T-Bar(For Transitions)

LAN   DC 12V IN

TALLY   HOST   DEVICE   POWER

TALLY   HOST   DEVICE   POWER

*10 channels live streaming switcher, and supports 10 channels PGM +10 channels PVW live streaming switch.
*40 physical buttons are integrated on control panel for switching of channels and effects.
*Built-in audio adjustment function, and up to 5 channels' audio volume can be adjusted by 5 knobs integrated on the control panel.

*Easy connection, and only 1 network cable is needed to connect ATEM equipment and PC.

Easy Connection

Only one network cable is needed to connect ATEM equipment with PC

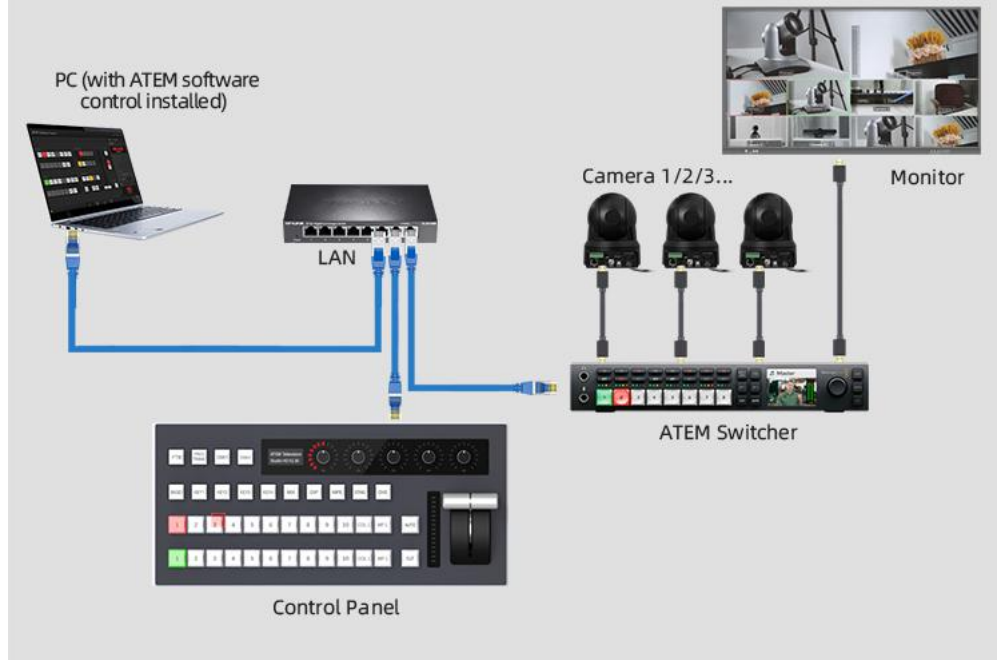***Stylish appearance, anodized aluminum alloy panel, and can be adapted to various environments.**
*Tally function, and supports 20 channels Tally signals (10 channels PGM +10 channels PVW) output by DB25 interface.

10 Channels PGM & PVW

40 physical buttons are integrated on control panel for switching of channels and effects

Connection Diagram

PC (with ATEM software control installed)

LAN

Camera 1/2/3...

Monitor

ATEM Switcher

Control Panel

Audio control

Up to 5 channels audio volume adjustments can be controlled via 5 integrated knobs of the machine

ATEM Television Studio HD V2.30

EY4   MIX   DIP   WIPE   STING   DVE

6   7   8   9   10   COL 1   MP 1   AUTO

6   7   8   9   10   COL 1   MP 1   CUT

Main features:	
Compatible device	KT-KD50A: Blackmagic Atem
Connection method	KD50A: LAN (support POE)
channel	KD50A: 10 inputs + 1 COL + 1 MP
volume control	1 input + 4 output
Transition control	Automatic transition, hard cut, T-Bar
Transition effects	Support
Status light	Support
Display screen	Support
Tally	10-channel PGM+10-channel PVW
Power supply	
Input voltage	DC 12V
Input Current	0.3A
Rated power	4W
POE	KD50A: Standard802.3AF
Others	
Use environment	Indoor
Operating temperature	0℃~40℃
Storage temperature	-10℃~50℃
Dimensions	420*257.52*121.2mm

What's in the box?

Box*1

Switcher*1

Power adapter*1

USB cable*1

Manual*1