

AIR Series



Quick Start Guide


Document Version: v1.5

AVIWEST
Shaping tomorrow's live video


Parc Edonia, Bat. X1
Rue de la Terre de Feu
35769 Saint Grégoire Cedex
France
Tel: +33 2 56 56 50 14
Email: info@aviwest.com

Front View

Indicators

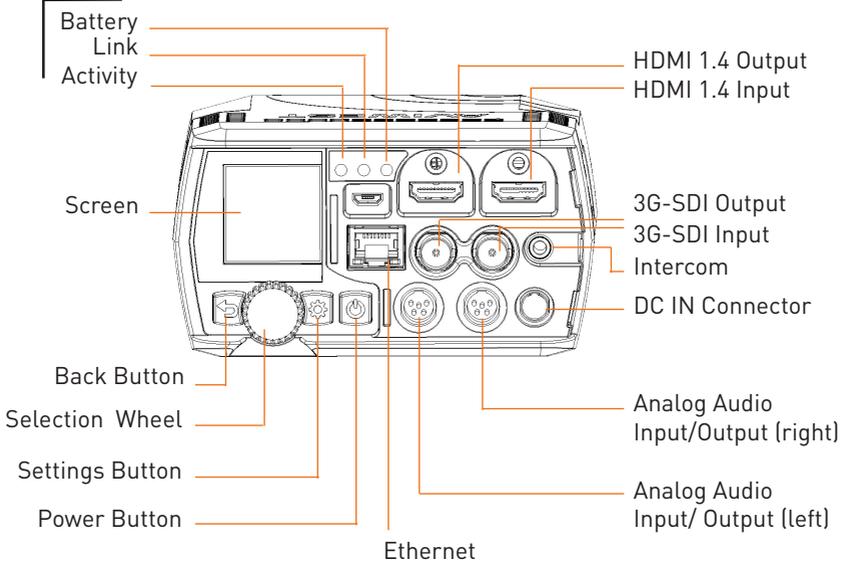


Rear View

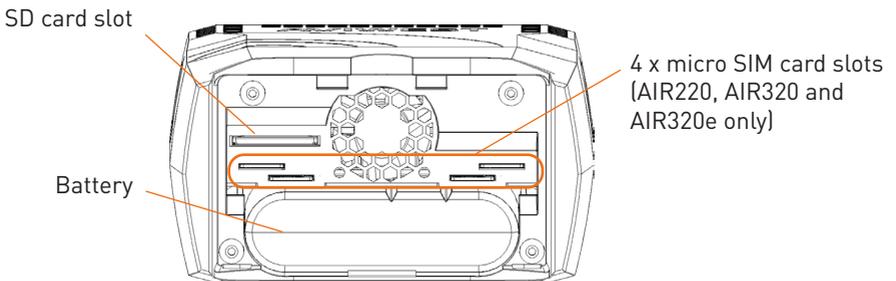


Getting ready


1. Remove the rear cover.
 - 1a. Press on top.
 - 1b. Remove the cover.

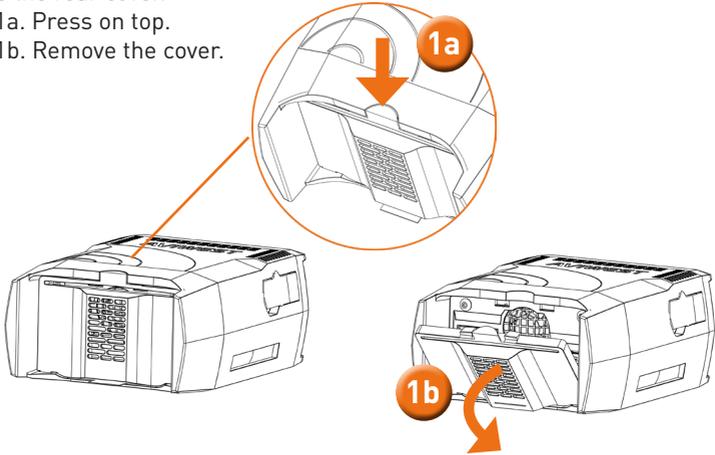


2. Insert the battery (if not already installed).

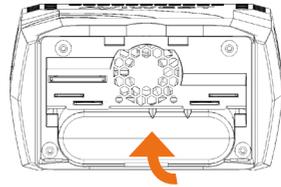

3. Connect the AC/DC adapter to the unit and connect it to the power supply.

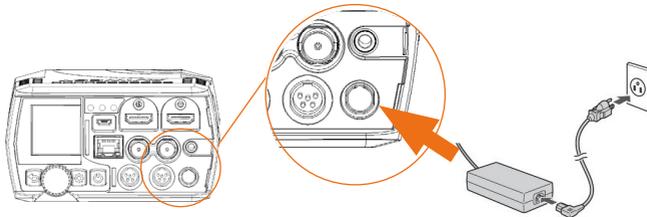

4. The battery indicator lights up in green when charging. It turns to blue when the unit battery is fully loaded.

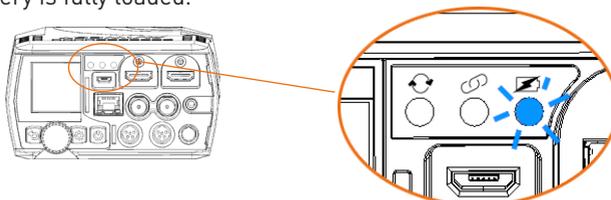


5. Insert an SD card



- ✓ Class 10 recommended
- ✓ FAT 32 or exFAT


6. Insert SIM cards into slots (AIR220, AIR320 or AIR320e).

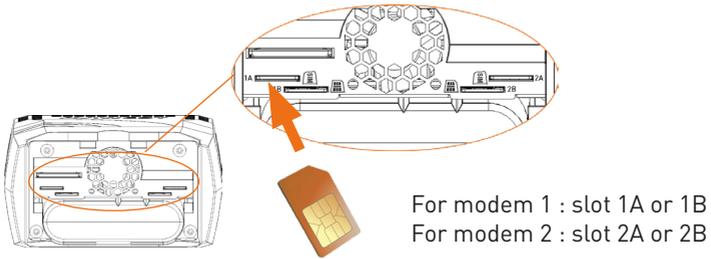

For modem 1 : slot 1A or 1B
For modem 2 : slot 2A or 2B


7. Place the rear cover back.

8. Connect the video input cable (either HDMI or SDI).

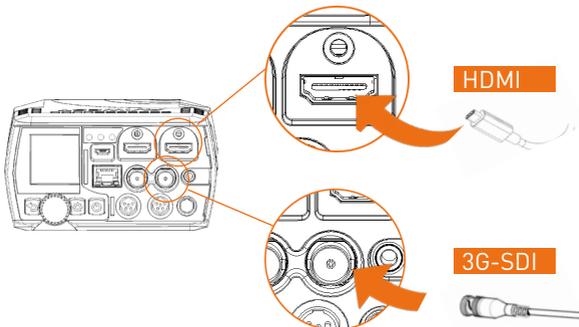

Turning on the unit

Press the power button to turn the unit on.

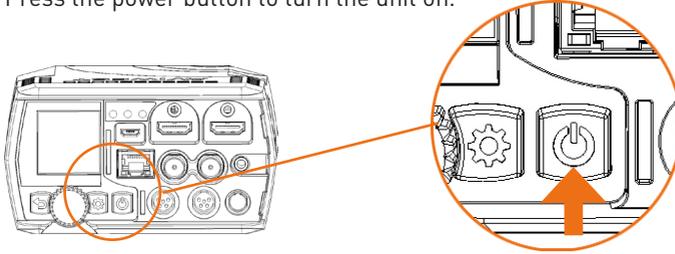

When the unit is ready, the home screen appears:




Selecting a Video Source

1. Select  and press  to confirm.

2. Select  and press  to confirm.
The default source is Auto.

3. Check that video source is Auto. If not, press  and turn  to select Auto.

5. Press  to confirm.



Configuring a Destination Profile

1. Select  and press  to confirm.



2. Select  and press  to confirm.



3. Press  to enter the DESTINATION Create menu.

4. Press  to activate the keyboard and compose a name for the Destination Profile.




5. Select  and press  to confirm.


6. Turn  to select the Type field, and press to select StreamHub as Destination Profile Type.



7. Turn  to select the Host field, and press the wheel to enter the StreamHub IP address or Hostname.



8. Turn  to select the Input field, and press the wheel to select Auto (for an Automatic Channel assignment).



9. Turn  to select and enable the Auto-connect function.




10. Turn  to select  and press  to confirm.

Starting a Live

1. Select  and press  to confirm.

2. Turn  to the right to access the LIVE menu.

The LIVE menu displays information:

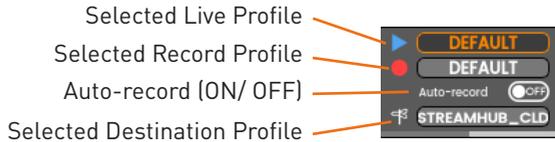

3. Turn  to the left to select .

4. Press  to start the live.



5. Turn  to the left for more information.

i

- Some indications are displayed:
 - Network Bitrate: 10.9 Mbps
 - Source Standard: 720p50
 - End to End Latency: 1.0 s
 - Live Duration: 00:00:51
- When Auto-record is ON, additional indications appear:
 - Space used on SD Card: 10:41
 - Remaining Recording Time possible on SD card: 00:01:06

Stopping a Live

1. Turn  to the right.

2. Press  to stop the Live.

3. Press  again to confirm stopping the Live.



Starting a Record

1. Select  and press  to confirm.

2. Turn  to access the RECORD menu.


The RECORD menu displays information:



Selected Record Profile

Auto-record (ON/ OFF)

Selected Destination Profile



3. Turn  to the left to select .

4. Press  to start the live.

Audio Levels

Live Duration



5. Turn  to the left for more information.

i

- Some indications are displayed:
 - Amount and percentage of data already forwarded (if option enabled) Network Bitrate
 - Record Duration
- When Auto-forward is ON, additional indications appear:
 - Space used on SD Card
 - Remaining Recording Time possible on SD card
 - Source Standard

Stopping a Record

1. Turn  to the right.

2. Press  to stop the Record.

3. Press  again to confirm stopping the Record.



Starting a Forward

1. Select  and press  to confirm.


The FORWARD menu appears:



- To forward the last record:
 - a) Turn  to select .
 - b) Press  to confirm.
- To forward the all files:
 - a) Turn  to select .
 - b) Press  to confirm.
- To forward some specific files:
 - a) Turn  to select  and press  to confirm.
 - b) Press  to display the SD card content.
 - c) Turn  and press it to select files.
 - d) Long press  to start Forward.

Stopping a Forward

1. Turn  to the right.




2. Press  to stop the Forward.

3. Press  again to confirm stopping the Forward.



Turning off the unit

Long press the power button to turn the unit off.

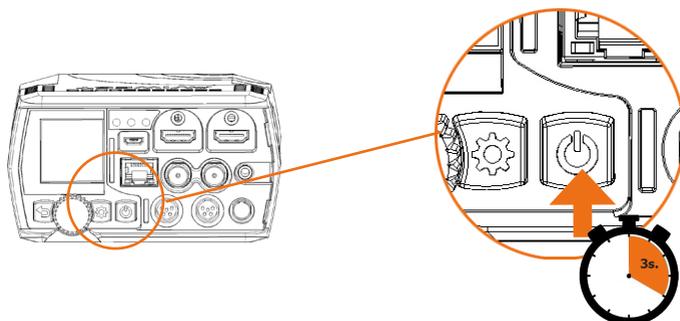

All technical documents

Scan the following QR Code to access the Aviwest portal and get access to all technical documents (user guide, release notes...).

